


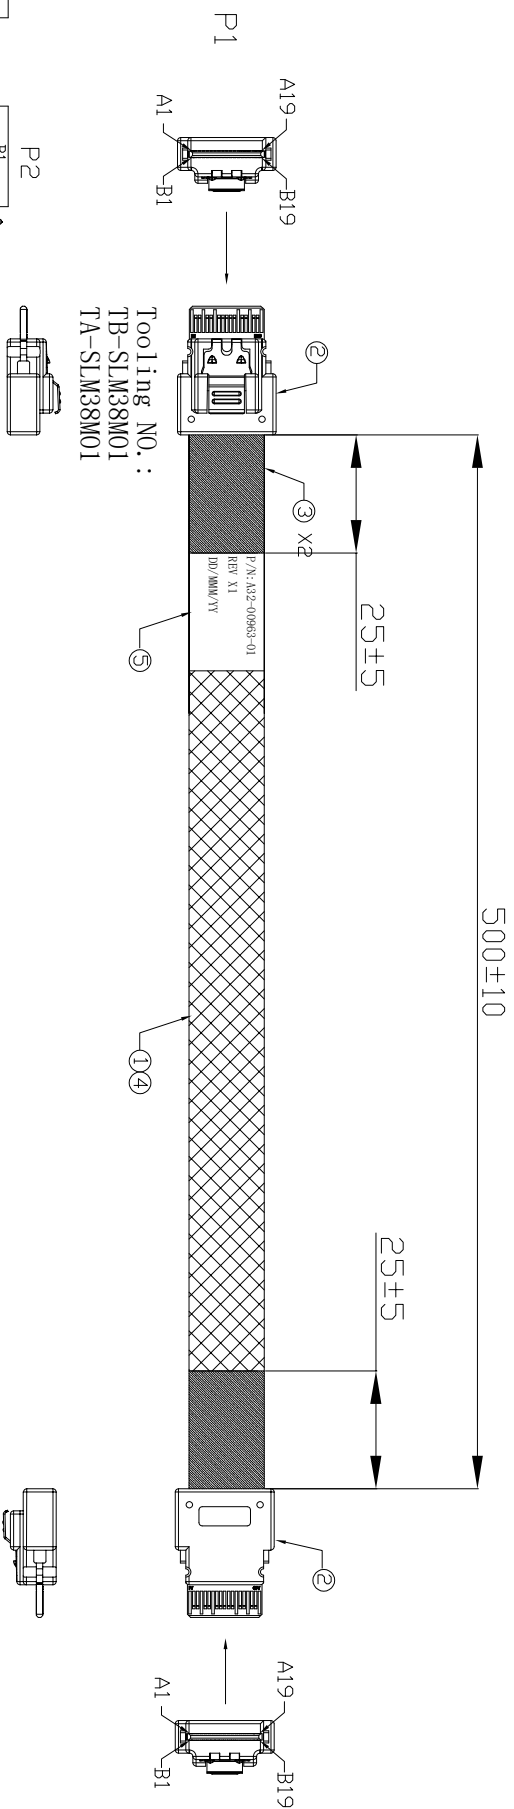

- NOTES:**
1. ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE4.0 INDUSTRIAL STANDARD
电气和机械特性满足PCIE4.0工业标准
 2. THE CABLE ASSEMBLY SHOULD BE ROHS COMPLIANT.
该产品符合RoHS.
 3. THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA: $85 \pm 10\%$ OHMS, CABLE ABSOLUTE AREA: $85 \pm 10\%$ OHMS.
该产品满足下面阻抗特性: 接触区域 $85 \pm 10\%$ 欧姆, 线材为 $85 \pm 10\%$ 欧姆.

[illegible]

ITEM	P/N	DESCRIPTION	QTY	UNIT
5	605040xxx	LABEL, W=30mm White	1	PCS
4	605040426	EXPANDO TUBE; OD=8.0mm, BLACK, VW-1, HF	A/R	MM
3	605011152	Polyester tape; T=0.12mm, W=30mm, BLACK, ROPS	A/R	MM
2	7417075001	SLIMSAS 4L 85Ω SFR	2	PCS
1	603010116	SAS; UL20744, 30AWG*2C+2E+AM, 85Ω, 24G, HF	A/R	MM

A	△	2023/12/11	NEW ISSUE	Jack Chen	☐ : ☒ : CRITICAL MAJOR	☐ : ☒ : X. ±0.60 .X ±0.40 .XX ±0.25



Kinkun

东莞市肇国电子有限公司

SCALE:	N:1	DATE:	2023/12/11	Huangmei	Jack Chen	A3200963
--------	-----	-------	------------	----------	-----------	----------

DATE	DESCRIPTION	APPROVER
	ZERO DEFECT S.P.C	