
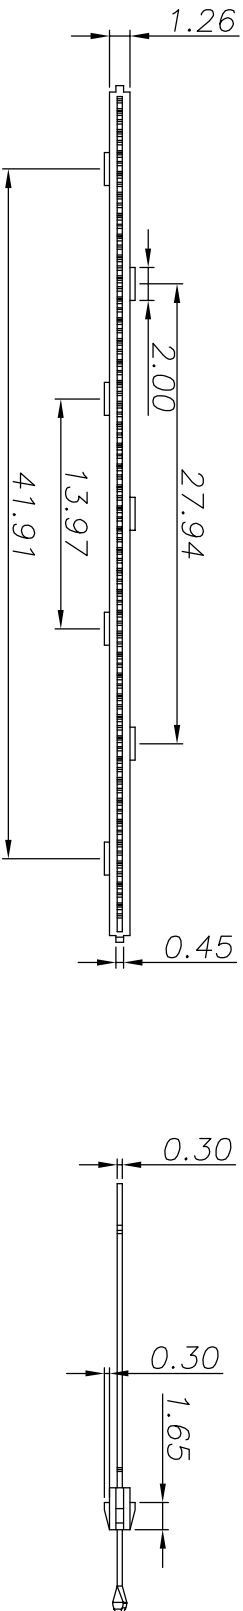


ROHS COMPLIANT

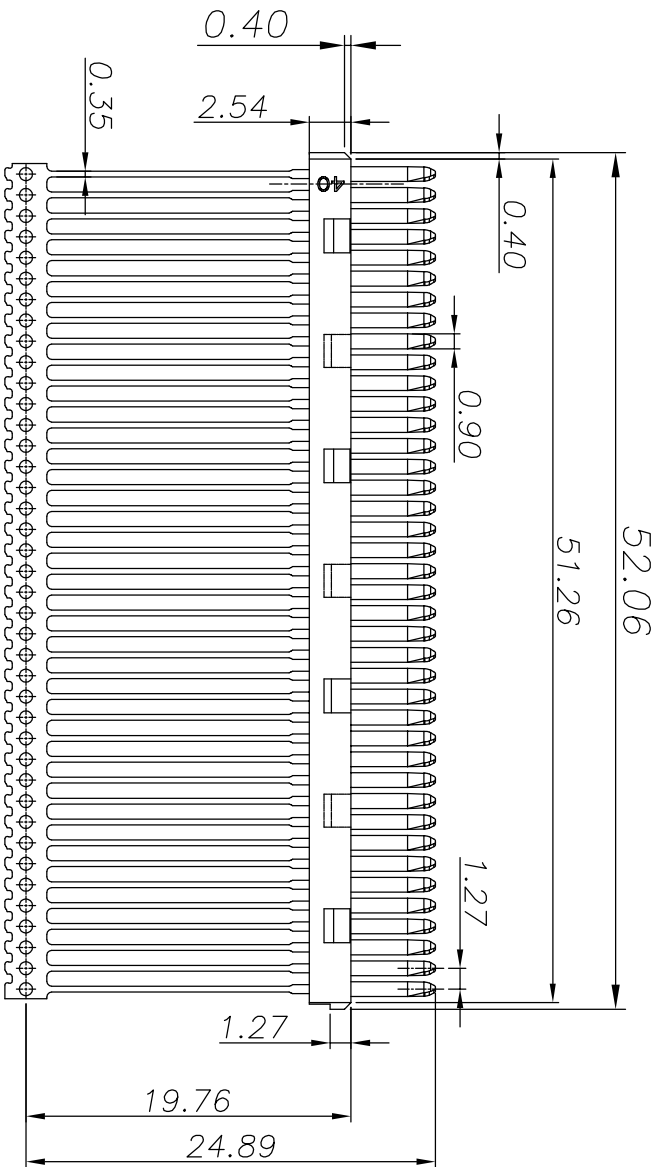

						QUALITY SYMBOLS		Tolerance		NAME:		LFH Pitch=1.27mm Terminal 1*40Pin		PART NO.		70984-4009					
△						□ : ☒ :		.x ±0.50		REV:		B UNIT: mm		DRW BY		CHK BY		APP BY		DRAWING NO.	
△						CRITICAL MAJOR		.x ±0.30		SCALE:		NONE		DATE: 2021/03/15		DAW NHU		Moo		70984-01	
△		2021/03/15		新版发行		JANE ZHEN		▽ : ▽ :													
SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT S.P.C													
8		7		6		5		4		3		2		1							
东莞市箐国电子有限公司																					

	8	7	6	5	4	3	2	1						
F	Part No:71624-3000 & 70984-4009 RoHS COMPLIANT NOTE: 1.MATERIALS: 1. INSULATOR: HIGH TEMPERATURE, LCP UL 94V-0 RATED. 2. CONTACTS: PHOSPHOR BRONZE, T=0.30mm. CONTACT AREA: 15U” GOLD FALSH PLATING. SOLDER AREA: 100U”MIN TIN PLATING UNDER PLATE: 50U”MIN NICKEL OVERALL 3. SHELL: STEEL SPCC, NICKEL PLATED.													
E														
D	2.ELECTRICAL PERFORMANCE: 1. RATED CURRENT: 0.30A/CONTACT 2. INSULATION RESISTACE: 20MΩ Min 3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC r.m.s 4. OPERATING TEMPERATURE: -25°C TO +85°C													
C	3.MECHANICAL PERFORMANCE: 1. Durability: Min 100 mating cycles													
B														
A	△			QUALITY SYMBOLS □: ☒:	Tolerance x. ±0.50 x ±0.30 .xx ±0.10	NAME:LFPH Pitch=1.27mm 160P in Connector			PART NO.	70984-4009	DRAWING NO.			
	△					REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	ALHF-01	
	△	2021/03/15	新版发行		CRITICAL	MAJOR	SCALE:	NONE	DATE:	2021/03/15	DAW NHU	KING ZHOU		
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C		东莞市箐国电子有限公司							
	8	7	6	5	4	3	2	1						