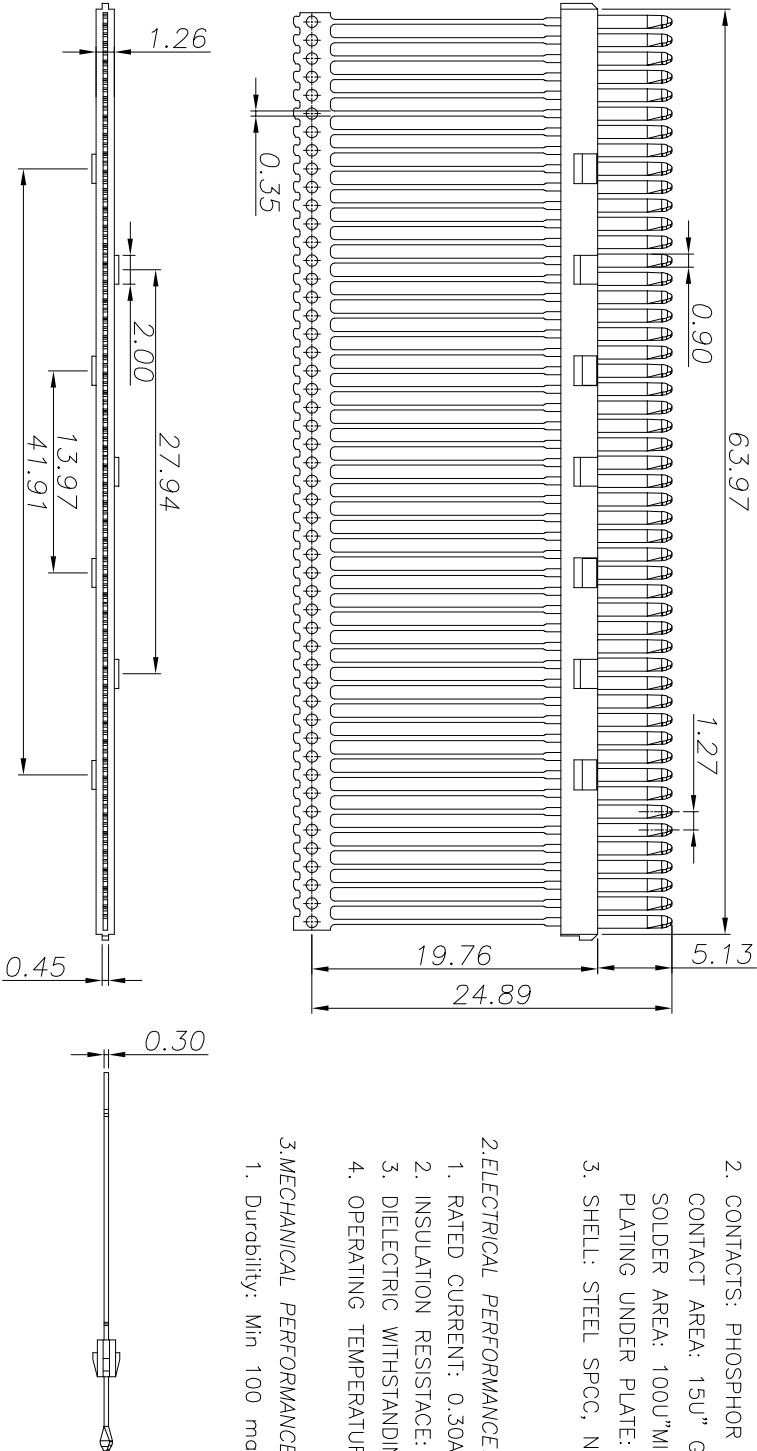



8		7	6	5	4	3	2	1
<div>NOTE:</div> <div>1.MATERIALS:</div> <div>1. INSULATOR: HIGH TEMPERATURE, LCP UL 94V-0 RATED.</div> <div>2. CONTACTS: PHOSPHOR BRONZE, T=0.30mm.</div> <div>CONTACT AREA: 15U" GOLD FALSH PLATING.</div> <div>SOLDER AREA: 100U"MIN TIN</div> <div>PLATING UNDER PLATE: 50U"MIN NICKEL OVERALL</div> <div>3. SHELL: STEEL SPCC, NICKEL PLATED.</div> <div>2.ELECTRICAL PERFORMANCE:</div> <div>1. RATED CURRENT: 0.30A/CONTACT</div> <div>2. INSULATION RESISTACE: 20MΩ Min</div> <div>3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC r.m.s</div> <div>4. OPERATING TEMPERATURE: -25°C TO +85°C</div> <div>3.MECHANICAL PERFORMANCE:</div> <div>1. Durability: Min 100 mating cycles</div>								
								
<div>PART NAME:</div> <div>(Pitch=1.27mm)LFH 200P Terminal 1x50Pin</div> <div>PART NO:</div> <div>71715-4001</div>								
<div>QUALITY SYMBOLS</div> <div><input type="checkbox"/> : Tolerance</div> <div><input checked="" type="checkbox"/> : ±0.60</div> <div><input type="checkbox"/> : CRITICAL</div> <div><input checked="" type="checkbox"/> : MAJOR</div> <div><input type="checkbox"/> : ZERO DEFECT</div> <div><input checked="" type="checkbox"/> : S.P.C</div>								
<div>REV:</div> <div>A</div> <div>UNIT:</div> <div>mm</div> <div>DRW BY</div> <div>Huangmei</div> <div>CHK BY</div> <div>Jack Chen</div> <div>APP BY</div> <div>71715</div>								
<div>SCALE:</div> <div>N:1</div> <div>DATE:</div> <div>2023/03/11</div>								
<div> 东莞市箐国电子有限公司</div> <div>www.kinkuo.com</div>								
8		7	6	5	4	3	2	1
SIDE		DATE	DESCRIPTION	APPROVER				