
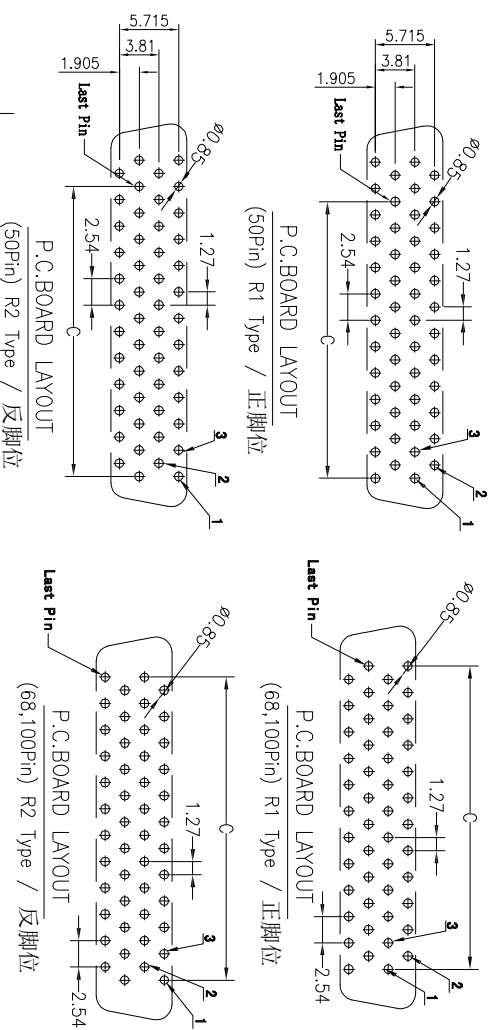
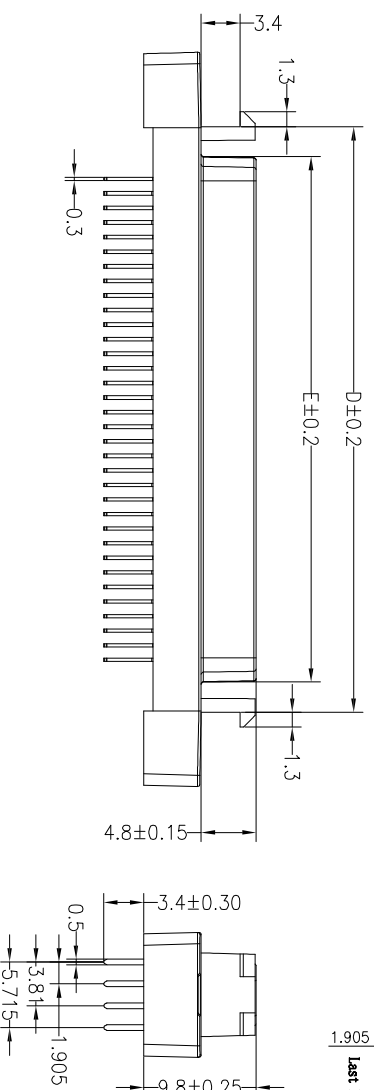


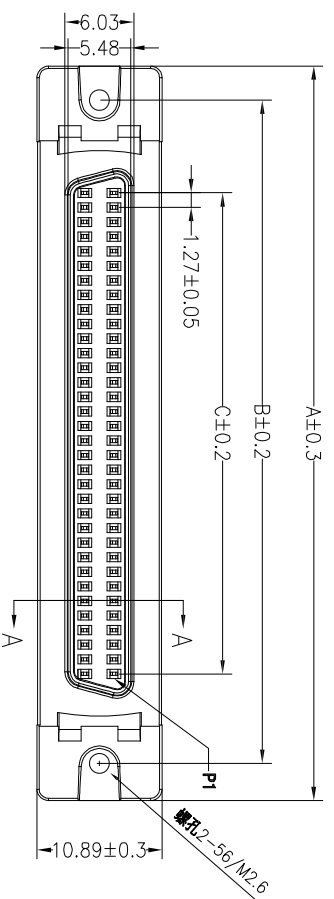

No. of	DIME NSIONS				
	A	B	C	D	E
Pin					
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.30	78.12	62.23	71.32	66.10

Part No.:

B02-XXX818EC-XX

SPECIFICATIONS

Voltage Current Rating: 1.0Amp. 250V AC
Insulation Resistance: 500M Ω Min.
Contact Resistance: 35m Ω Max.
Dielectric Withstanding Voltage: 500V AC
Temperature Range: -40 $^{\circ}$ C to +105 $^{\circ}$ C

- PCB LAYOUT:

0A= R1 正脚位
0B= R2反脚位

- No. of Pin:

 $0.50 = 50 \text{ P.in}$

068 = 68Pin

$$100 = 100P_{in}$$

3	SHELL	ZINC ALLOY	PALTING:NI	1	pcs
2	HOUSING	PBT+30%GF	COLOR:BLACK	2	pcs
1	TERMINAL	COPPER ALLOY	CONTACT PALTING:AU G/F, SOLDER PALTING:NI	XX	pcs
NO.	PART NAME	DESCRIPTION	REMARKS	QTY	UNIT
PART	NAME:	SCSI DB Female Connector	V/T DIP Type	PART NO.:	B02-XXX818EC--XX

☐ ☒

CRITICAL MAJOR

ZERO DEFECT S.P.C.

Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO B02-818
	SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jack Chen		
	.x	±0.60						
	.x	±0.40						
.xx	±0.25							
		 东莞市箐国电子有限公司 www.kinkuo.com						



东莞市箐国电子有限公司
www.kinkuo.com

www.kinkuo.com