

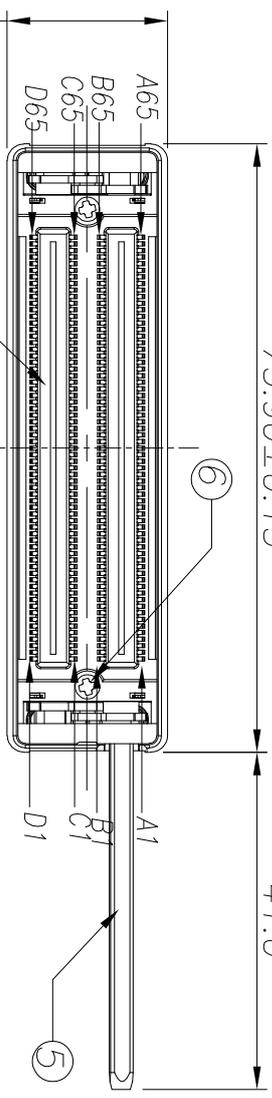
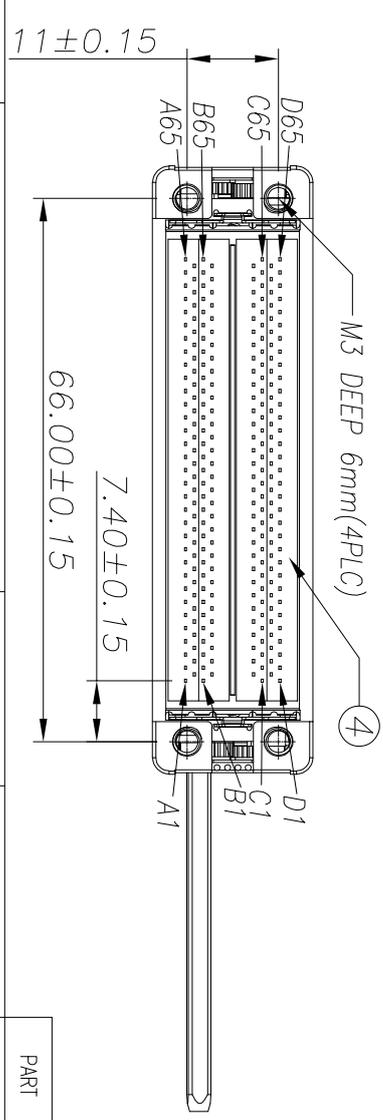


73.90±0.15

41.0

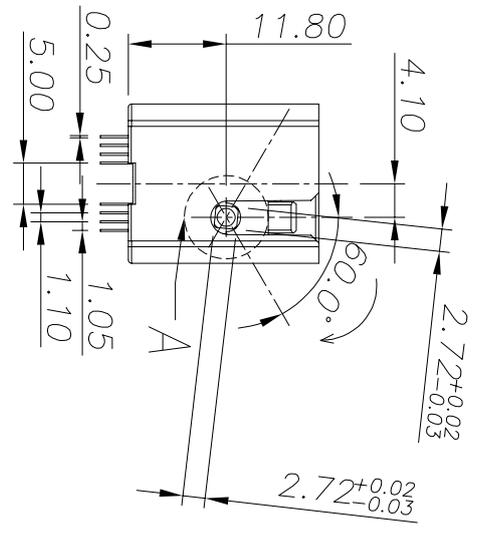

- SPECIFICATION:
1. RATED CURRENT: 0.30A/CONTACT
 2. INSULATION RESISTANCE: 500MOHM MIN.
 3. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
 4. OPERATING TEMPERATURE: -25°C TO +85°C

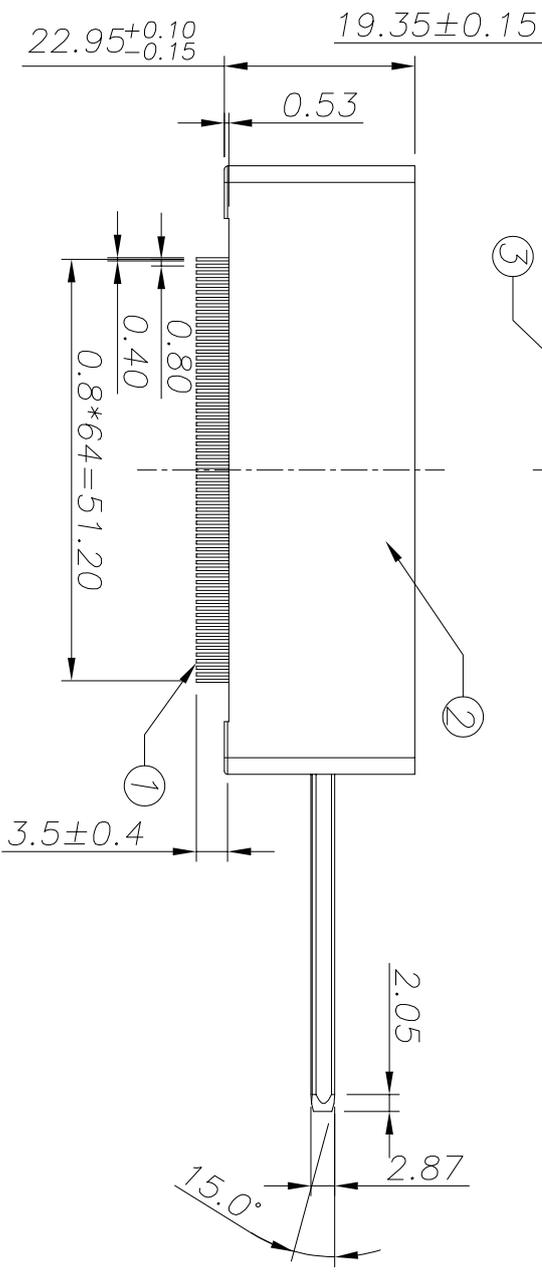

6	M2 SCREW	STAINLESS STEEL	2	pcs
5	ACTUATOR ASSY	SUS 304	4	pcs
4	INSERT MOLD	LCP +30% GF U194-V0 Block	2	pcs
3	COVER HOUSING	LCP +30% GF U194-V0 Block	1	pcs
2	BASE HOUSING	ZINC DIECAST Ni Plated	1	pcs
1	TERMINAL	COPPER ALLOY (Au 15U" on Contact AREA, TIN on Solder AREA)	260	pcs

PART NAME: Vertical Wire-to-Board 260Pos Connector TC-ZIF PART NO: 6565204-1

REV:	A	UNIT:	mm	DRW BY:	Huangmei	CHK BY:	Jack Chen	APP BY:		DRAWING NO.	6565204
SCALE:	N:1	DATE:	2025/05/22								


QUALITY SYMBOLS

□: CRITICAL MAJOR

▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
 .x ±0.40
 .xx ±0.25



REV	A	DATE	2025/05/22	DESCRIPTION	NEW ISSUE	APPROVER	Jack Chen
-----	---	------	------------	-------------	-----------	----------	-----------

KinKuo
 东莞市箐国电子有限公司
 www.KinKuo.com

