

## PRODUCT SPECIFICATION

PS-7716

Rev. A

ORIGINAL

**Title: Extremerport Z-Link Product Specification****Part Number: G64 series / G67 series / G66 series****Description: Extremerport Z-Link, 0.6 Pitch, SMT Type****Revisions Control**

Rev.	ECN Number	Originator	Approval	Issue Date
A	NE-22261	Sondra Sang	Hank Hsu	2022.11.25

**Product Specification Origination**

Originator:	Date:	Checked by:	Date:	Approved by:	Date:
Sondra Sang	2022/11/22	Joan Lu	2022/11/25	Hank Hsu	2022/11/25

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

© Amphenol Corporation 1992, 2022. All international rights are reserved.

Amphenol® is a trademark of Amphenol Corporation.

**PRODUCT SPECIFICATION*****PS-7716*****Rev. A****1. Scope**

This document defines the detailed requirements for the Amphenol [Extremepoint Z-Link](#) connector to insure functionality and reliability.

**2. Applicable documents**

- |            |                  |  |
|------------|------------------|--|
| <b>2.1</b> | EIA-364 Standard | Test methods for electrical connectors   |
| <b>2.2</b> | UL-STD-94        | Tests for flammability of plastic materials for parts in devices and appliances. |
| <b>2.3</b> | SFF-TA-1002      | Protocol Agnostic Multi-Lane High Speed Connector                                |

**3. Requirements****3.1 Design and construction**

Product shall be of the design, construction and physical dimensions specified on the applicable product drawing.

**3.2 Material and finish****3.2.1 Housing**

- High temperature thermoplastic, UL94V-0
- Color: Black

**3.2.2 Contact**

- Copper Alloy
- Contact area: Selected Gold plating
- Solder area: Matte Tin plating
- Under-plating: Nickel plating overall

**3.2.3 Shell**

- Stainless steel
- Solder area: Nickel under-plated overall(option 1)
- Solder area: Nickel under-plated, Matte Tin plating overall(option 2)

**3.3 Rating**

- Current: 1.1 A per 6pairs contact
- Voltage: 30 VDC per contact
- Temperature:
  - Operating: -40°C~ 105°C
  - Non-operating: -55°C~ 105°C

## PRODUCT SPECIFICATION

PS-7716

Rev. A

#### 4. Performance and testing

##### 4.1 Test requirements and procedures summary


Test	Test procedure	Test criteria
Visual & Dimensional inspection	EIA-364-18 Visual, dimensional and functional inspection.	Must meet the minimum requirements specified by product drawing.
<b>Electrical:</b>		
Low level Contact Resistance	EIA-364-23 Current: 100 mA maximum Voltage: 20 mV maximum	Initial: Baseline After test: $\Delta R=20$ milliohms maximum
Dielectric Withstanding Voltage	EIA-364-20 Apply a voltage between adjacent terminals. Voltage: 300 VDC Duration: 1 minute	No defect or breakdown No disruptive discharge No leakage current in excess of 0.5mA
Insulation resistance	EIA-364-21 Apply a voltage between adjacent terminals. Voltage: 100 VDC Duration: 1 minute	1000 Megaohm minimum
Temperature Rise (via current cycling)	EIA-364-70 Measure the temperature rise at the rated current. Ambient temperature: 25°C up to a maximum of 6 adjacent pins per side, 12 pins total	30°C maximum change from initial

## PRODUCT SPECIFICATION

PS-7716

Rev. A

## High Speed Electrical Requirements:

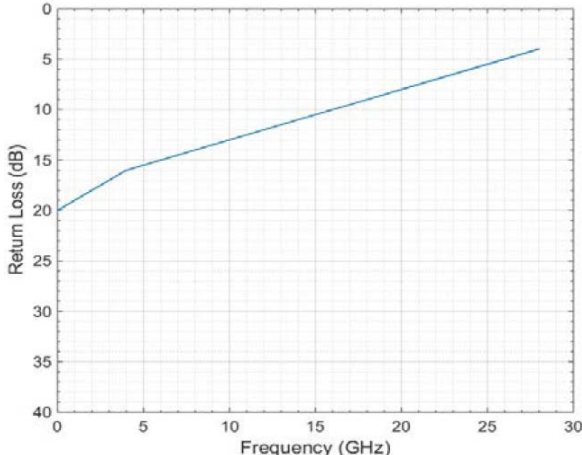Line Rate	Insertion Loss	Return Loss	Power Sum Near End and Far End Crosstalk
56 GT/s PAM4	Loss up to 16GHz $\leq 1$ dB	 <p>Return Loss (dB)</p> <p>Frequency (GHz)</p>	Up to 16GHz $\leq 40$ dB

## Mechanical:

Durability (preconditioning)	EIA-364-09 20 unmate/mate cycles	No evidence of physical damage.
Durability	EIA-364-09 Cycle rate: 500±50 per hour Number of cycles: 200 cycles for 30μ" Au plating 100 cycles for 15μ" Au plating	No evidence of physical damage.
Mating Force (Module only)	EIA-364-13 Rate: 25.4 mm/minute	1.1 N Max./per pair pin
Un-mating Force (Module only)	EIA-364-13 Rate: 25.4 mm/minute	0.1 N Min./per pair pin
Active Latch Retention Strength	EIA-364-13 Rate: 25.4 mm/minute Pull in direction parallel to insertion, hold for minimum of 60 seconds	50 N minimum
Wrenching strength (W/ mated Cable- Passive Latch)	Bend cable 90° at minimum bend radius. Pull in 4 axis directions for round cable. Pull in 2 axis directions for flat cable. No damage to plug/ cable assembly.	25 N minimum

**PRODUCT SPECIFICATION****PS-7716****Rev. A**

Wrenching strength (W/ mated Cable- Active Latch)	Bend cable 90° at minimum bend radius. Pull in 4 axis directions for round cable. Pull in 2 axis directions for flat cable. No damage to plug/ cable assembly.	40 N minimum
Contact Normal Force	EIA-364-04 Rate: 25.4 mm/minute	0.49 N (50 grams) minimum at nominal
Vibration	EIA-364-28, Test Condition VII, Condition D Subject mated specimens to 3.10 G's rms between 20-500 Hz for 15 minutes in each of 3 mutually perpendicular planes.	No Damage No discontinuity longer than 1usec allowed. 20 mOhms maximum change from initial (baseline) contact resistance
Mechanical Shock	EIA-364-27, Test Condition H Subject mated specimens to 50 G's half-sine shock pulses of 11 milliseconds duration. 3 shocks in each direction applied along 3 mutually perpendicular planes, 18 total shocks.	No Damage 20 mOhms maximum change from initial (baseline) contact resistance
Reseating	Manually unmate/mate the connector 3 cycles.	No evidence of physical damage.
<b>Environmental:</b>		
Thermal Shock	EIA-364-32, Method A Test condition 1 -55 °C to 85 °C, perform 5 cycles in mating condition	No Damage 20 mOhms maximum change from initial (baseline) contact resistance
Humidity- Temperature Cycling	EIA-364-31, Method III	No Damage 20 mOhms maximum change from initial (baseline) contact resistance
Temperature Life (preconditioning)	EIA-364-17, Method A Subject mated specimens to 105°C for 72 hours	No Damage
Temperature Life	EIA-364-17, Method A Test Condition 2, Test Time Condition C Subject mated specimens to 105°C for 120 hours	No Damage 20 mOhms maximum change from initial (baseline) contact resistance

## PRODUCT SPECIFICATION

*PS-7716*

Rev. A

Mixed flowing gas (MFG)	EIA-364-65, class IIA Test condition: mated connector. RH: 70±2% Temperature: 30±1°C Cl <sub>2</sub> : 10±3 ppb NO <sub>2</sub> : 200±50 ppb H <sub>2</sub> S : 10±5 ppb SO <sub>2</sub> : 100±20 ppb Duration: 7 days	No evidence of physical damage
Salt Spray	EIA-364-26B Test condition: mated connector. a.) 5±1% salt. b.) temperature :35±2°C. c.) Duration: 48 hours.	No evidence of physical damage  LLCR Initial: baseline After test: ΔR=20 milliohms maximum
Solderability	J-STD-002E Test Method A1: Temp:245°C±5° C, Immerse and withdraw at 1 mm - 5 mm, per second and dwell for 5 +0/-0.5 seconds, Leads and terminations shall have flux applied uniformly and to cover the surfaces to be tested.	95% of immersed area must show no voids or pin holes.
Resistance to soldering heat (Infrared reflow)	EIA-364-29 Average ramp rate: 1~4°C per second Temperature(board surface): 250 +10°C/-0°C Duration:30~35 seconds	No evidence of physical damage

## PRODUCT SPECIFICATION

PS-7716

Rev. A

## 4.2 Test Sequence

Test or Examination	Test Groups													
	A	B	C	D	E	F	G	H	I	J	K	L	M	N
Examination of connector(s)	1,8	1,10	1,10	1,12	1,9	1,3	1,7	1,5	1,3	1,3	1,3	1,3	1,3	1,3
Current Rating						2								
LLCR	2,5,7	2,5 7,9	2,5 7,9	2,5,7 9,11	4,6			2,4						
Insulation Resistance					3,8									
Dielectric Withstanding Voltage					2,7									
Durability					5									
Durability (Preconditioning)	3	3	3	3										
Matting/un-mating Force							3,6							
Reseating	6	8		10			2,5							
Thermal Shock		4												
Humidity-Temperature Cycling		6												
Thermal disturbance				8										
Temperature Life	4						4							
Temperature Life (Preconditioning)			4	4										
Mechanical Shock			8											
Vibration			6											
Salt Spray								3						
Mix Flowing Gas(MFG)				6										
Solder ability									2					
Resistance to Soldering Heat										2				
Active Latch Retention Strength											2			
Contact Normal Force												2		
Wrenching strength(W/mated cable-passive Latch)													2	
Wrenching strength(W/mated cable-active Latch)														2
Sample size	5	5	5	5	5	5	5	5	5	5	5	5	3	3

**Note:**


1. Test specimen shall be sure to meet the drawing before the testing.

## PRODUCT SPECIFICATION

PS-7716

Rev. A

## 4.3 Recommended IR reflow profile(Lead-free)

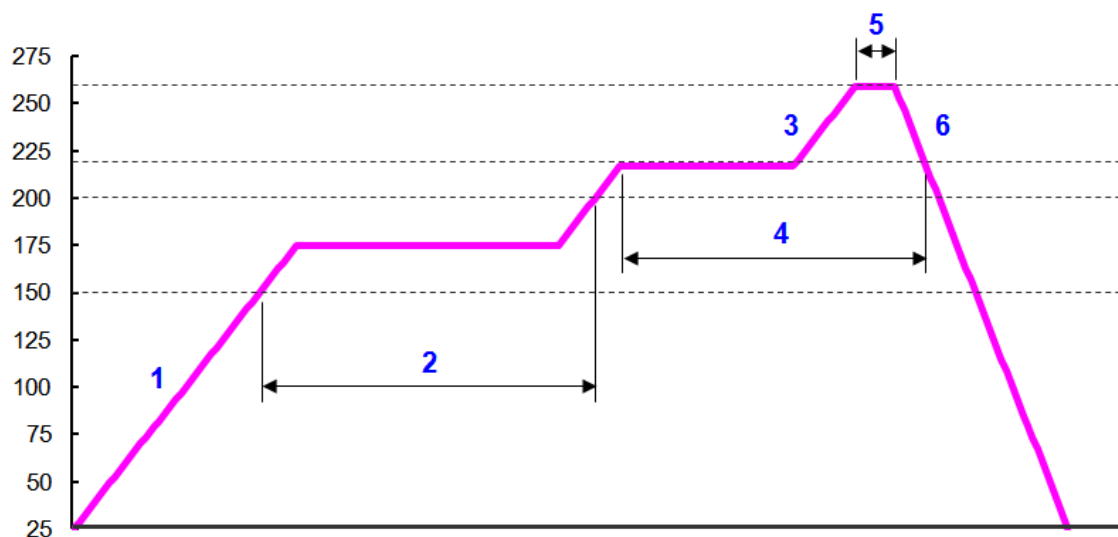

<b>1, 3</b>	Average ramp-up rate	3°C/second max.
<b>2</b>	Preheat	
	- Temperature Min	150°C
	- Temperature Max	200°C
	- Pre-heat time	60-180 seconds
<b>4</b>	Time maintained above	
	- Temperature	217°C
	- Time	60-150 seconds
<b>5</b>	Peak temperature	260°C
	Time within 5°C of actual peak	20-40 seconds
<b>6</b>	Ramp-down Rate	6°C/second max.
	Time 25°C to peak Temperature	8 minutes max.